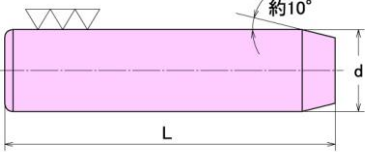
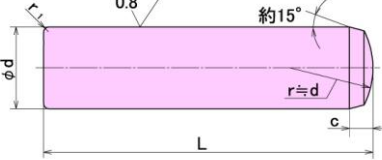
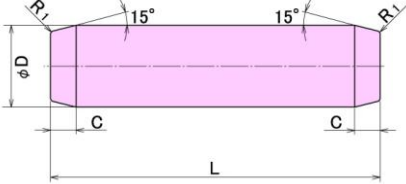
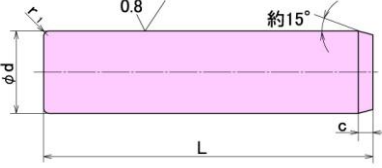
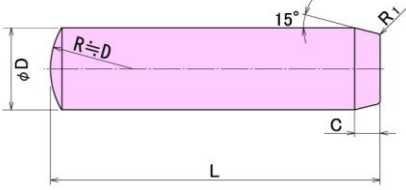
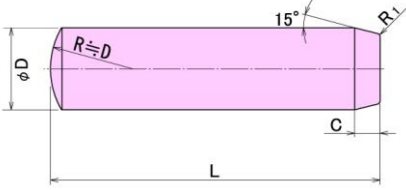



ダウエルピン JIS対比

規格	大喜多規格 ダウエルピン			JIS B 1355 ダウエルピン		JIS B 5062 金型用ダウエルピン	
名称	A型	B型	C型	A種	B種	A形1種	A形2種
材質	SCM445			SUJ2	S09CK SUM24L	規定なし	
熱処理	焼入れ焼戻し			焼入れ焼戻し	浸炭焼入れ焼戻し	焼入れ焼戻し	
硬さ	HRC58~62			HRC53~58	HV600~700	HRC45~52	
許容差	+0.010 +0.005	+0.005 0	0 -0.005	m6		m6	+0.010 +0.005

形状		<p>A種</p> 	<p>A形1種</p> 																																																																																																																											
		<p>B種</p> 	<p>A形2種</p> 																																																																																																																											
寸法	<p>端面は平面又は丸面とする</p> 		<table border="1"> <tr> <th>呼び径 d</th> <td>1</td><td>1.5</td><td>2</td><td>2.5</td><td>3</td><td>4</td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td><td>16</td><td>20</td> </tr> <tr> <th>a</th> <td>約 0.12</td><td>0.2</td><td>0.25</td><td>0.3</td><td>0.4</td><td>0.5</td><td>0.63</td><td>0.8</td><td>1</td><td>1.2</td><td>1.6</td><td>2</td><td>2.5</td> </tr> <tr> <th>c</th> <td>約 0.5</td><td>0.6</td><td>0.8</td><td>1</td><td>1.2</td><td>1.4</td><td>1.7</td><td>2.1</td><td>2.6</td><td>3</td><td>3.8</td><td>4.6</td><td>6</td> </tr> <tr> <th rowspan="2">r1</th> <td>最小</td> <td>-</td><td>0.2</td><td>0.2</td><td>0.3</td><td>0.3</td><td>0.4</td><td>0.4</td><td>0.4</td><td>0.5</td><td>0.6</td><td>0.6</td><td>0.8</td><td>0.8</td> </tr> <tr> <td>最大</td> <td>-</td><td>0.6</td><td>0.6</td><td>0.7</td><td>0.8</td><td>0.9</td><td>1</td><td>1.1</td><td>1.3</td><td>1.4</td><td>1.6</td><td>1.8</td><td>2</td> </tr> </table>	呼び径 d	1	1.5	2	2.5	3	4	5	6	8	10	12	16	20	a	約 0.12	0.2	0.25	0.3	0.4	0.5	0.63	0.8	1	1.2	1.6	2	2.5	c	約 0.5	0.6	0.8	1	1.2	1.4	1.7	2.1	2.6	3	3.8	4.6	6	r1	最小	-	0.2	0.2	0.3	0.3	0.4	0.4	0.4	0.5	0.6	0.6	0.8	0.8	最大	-	0.6	0.6	0.7	0.8	0.9	1	1.1	1.3	1.4	1.6	1.8	2	<table border="1"> <tr> <th>呼び径 d</th> <td>2</td><td>2.5</td><td>3</td><td>4</td><td>5</td><td>6</td><td>8</td><td>10</td><td>12</td><td>13</td><td>16</td><td>20</td> </tr> <tr> <th>C</th> <td>約 0.35</td><td>0.4</td><td>0.5</td><td>0.63</td><td>0.8</td><td>1.2</td><td>1.6</td><td>2</td><td>2.5</td><td>3</td><td>3</td><td>3.5</td> </tr> <tr> <th rowspan="2">R1</th> <td>最大</td> <td colspan="11">0.6</td> </tr> <tr> <td>最小</td> <td colspan="11">0.2</td> </tr> </table>	呼び径 d	2	2.5	3	4	5	6	8	10	12	13	16	20	C	約 0.35	0.4	0.5	0.63	0.8	1.2	1.6	2	2.5	3	3	3.5	R1	最大	0.6											最小	0.2										
呼び径 d	1	1.5	2	2.5	3	4	5	6	8	10	12	16	20																																																																																																																	
a	約 0.12	0.2	0.25	0.3	0.4	0.5	0.63	0.8	1	1.2	1.6	2	2.5																																																																																																																	
c	約 0.5	0.6	0.8	1	1.2	1.4	1.7	2.1	2.6	3	3.8	4.6	6																																																																																																																	
r1	最小	-	0.2	0.2	0.3	0.3	0.4	0.4	0.4	0.5	0.6	0.6	0.8	0.8																																																																																																																
	最大	-	0.6	0.6	0.7	0.8	0.9	1	1.1	1.3	1.4	1.6	1.8	2																																																																																																																
呼び径 d	2	2.5	3	4	5	6	8	10	12	13	16	20																																																																																																																		
C	約 0.35	0.4	0.5	0.63	0.8	1.2	1.6	2	2.5	3	3	3.5																																																																																																																		
R1	最大	0.6																																																																																																																												
	最小	0.2																																																																																																																												